

Technical Data Sheet:

1. Name: Absorb Dry

2. Composition:

Name	CAS NO.	Percent	OSHA PELs	ACGIH TLVs
Magnesium chloride	-	>70	-	-
Glucose	50-99-7	<30	-	-

3. Physical and Chemical Properties:

Physical Status and Appearance:	Powder
Color:	White or gray
Odor:	Odorless
pH:	6.5 - 9.0
Melting point:	>200°C
Flammability:	Non-Flammable

4. Technical Parameter:

Working Temperature: - 10°C~ +80°C


Absorption rate: 200%

High Temperature Resistance: +120°C

Sustainable working hours: 2 years

Non-DMF conforms to RoHS standard and REACH standard

5. Comparisons of Water Absorption:

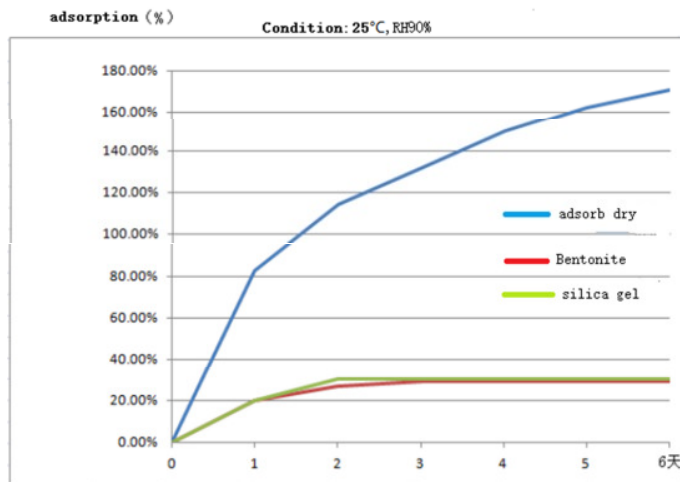

6. Sustainability:

ABSORB DRY using plant extracts, natural mineral materials and food grade raw materials, extracted by chemical large-scale production, does not add chemical synthetic materials, does not contain harmful substances, and can be completely degraded in natural environment for 3 to 6 months. Relevant products and technologies have been applied for national invention patents.

7. Application:

It is widely used in furniture, clothing, textile, leather, lamps, household appliances, electronic appliances, instruments, precision equipment, precision hardware, machinery, agricultural products, wood products, paper products, etc.

Topcod Deutschland GmbH
Wilhelm-Becker-Str. 11a
75179 Pforzheim
Tel: 07231 155 37 14
Fax: 07231 155 37 45
info@topcod.de